

**DON'T TELL THE OX IT
LOOKS HANDSOME.**

**THE DRIVE OVER HOPPER IS HERE TO UNLOAD
GRAIN, NOT WIN A FASHION SHOW.**

THERE'S
WORK
TO DO.



*SHOWN WITH OPTIONAL NECK EXTENSION



Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA
1-888-SUDENGA (783-3642) • 1-712-475-3301
Fax: 1-712-475-3320 • sales@sudenga.com • www.sudenga.com



The Ox Drive Over Hopper is available with electric or hydraulic drive options. It unloads at rates up to 7,500 BPH, but it keeps a low profile (9¾" high). Durable drag chain conveyor. Heavy duty, spring assisted ramps. Easy to set up. Easy to knock down. It is really something to behold. But don't tell it that.

DRIVE OVER HOPPER



STANDARD FEATURES

Capacities	3,500, 5,000, or 7,500 BPH
Deck Height	9¾"
Transport	Manual or hydraulic transport raise options; ramps feature spring-assist for easy set up and knock down Removable hitch Hitch jack
Hoppers	<ul style="list-style-type: none"> 36" x 48" center dump for trucks and trailers 24" x 36" side dump for gravity wagons (side dump folds down to cover the grate when not in use)

- Available in either electric or hydraulic power
 - Hydraulic drive uses Char-Lynn "H" Series 6.2 CID motor
 - Electric drive includes belt guards, shaft covers, and jackshaft double reduction
- 10 ga. construction
- Heavy D81x chain with reinforced UHMW paddles
- Rubber belting around center dump opening
- Separate inlets for gravity wagons and hopper trailer
- Straight, tapered, or flanged discharge openings; 10" x 16¾" standard discharge opening



MANUAL TRANSPORT RAISE

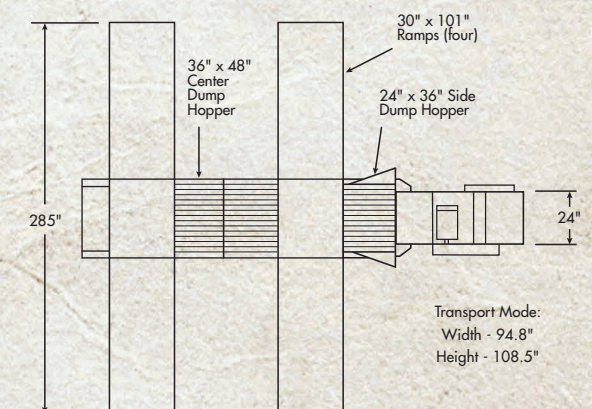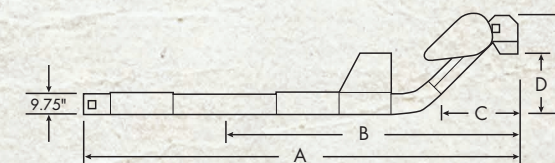

COLLAPSIBLE SPLASH GUARD



ELECTRIC DRIVE



HITCH JACK

HOPPER DIMENSIONS

	Standard Incline	36" Extension	48" Extension	60" Extension
A	17' 3"	19' 6"	20' 2"	20' 10"
B	11' 10"	13' 11"	14' 8"	15' 4"
C	39.2"	65"	73.7"	82.5"
D	26.9"	51.9"	60"	68.5"
E	48"	72.7"	81"	89.3"

OPTIONAL FEATURES

- Speed control valve kit: hydraulic drive
- Hydraulically operated transport
- Discharge neck extensions in 36", 48", and 60" lengths