

**DON'T TELL THE OX IT  
LOOKS HANDSOME.**

**THE DRIVE OVER HOPPER IS HERE TO UNLOAD  
GRAIN, NOT WIN A FASHION SHOW.**

THERE'S  
WORK  
TO DO.



Box 8 • 2002 Kingbird Ave. • George, IA 51237 USA  
1-888-SUDENGA (783-3642) • 1-712-475-3301  
Fax: 1-712-475-3320 • sales@sudenga.com • www.sudenga.com



The Ox Drive Over Hopper is available with electric or hydraulic drive options. It unloads at rates up to 7,500 BPH, but it keeps a low profile (9 3/4" high). Durable drag chain conveyor. Heavy duty, spring assisted ramps. Easy to set up. Easy to knock down. It is really something to behold. But don't tell it that.

# DRIVE OVER HOPPER

## STANDARD FEATURES

Capacities	3500, 5000, or 7500 BPH
Deck Height	9-3/4"
Transport	Manual or Hydraulic Transport raise options; ramps feature spring-assist for easy set up and knock down  Removable hitch  Hitch Jack
Hoppers	<ul style="list-style-type: none"> <li>36" x 48" center dump for trucks and trailers</li> <li>24" x 36" side dump for gravity wagons (side dump folds down to cover the grate when not in use)</li> </ul>

- Available in either electric or hydraulic power
  - Hydraulic drive uses Char-Lynn "H" Series 6.2 CID motor
  - Electric drive includes belt guards and shaft covers, and Jackshaft double reduction
- 10 ga. construction
- Heavy D81x chain with reinforced UHMW paddles
- Rubber belting around center dump opening
- Separate inlets for gravity wagons and hopper trailer
- Straight, tapered, or flanged discharge openings; 10" x 16 3/4" standard discharge opening



MANUAL TRANSPORT RAISE





ELECTRIC DRIVE



COLLAPSIBLE SPLASH GUARD



HITCH JACK

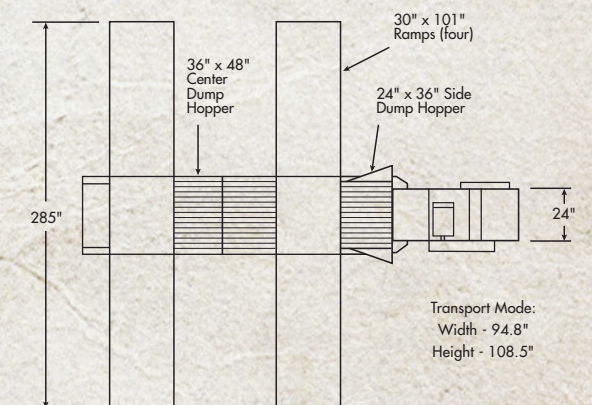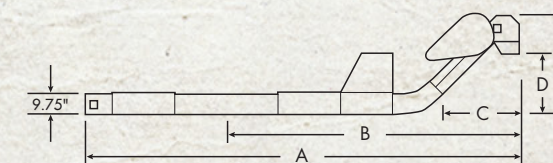

## HOPPER DIMENSIONS

	Standard Incline	36" Extension	48" Extension	60" Extension
A	17'-3"	19'-6"	20'-2"	20'-10"
B	11'-10"	13'-11"	14'-8"	15'-4"
C	39.2"	65"	73.7"	82.5"
D	26.9"	51.9"	60"	68.5"
E	48"	72.7"	81"	89.3"

## OPTIONAL FEATURES

- Speed Control Valve Kit: Hydraulic drive
- Hydraulic operated transport
- Discharge neck extensions in 36", 48", and 60" lengths