

# Kwik-Belt

- *Larger Capacity, Non-Leaking Transition*
- *Controlled Vertical Discharge Flow*
- *Larger Heavy Duty PEER Bearings*
- *Heavier Duty Undercarriage*
- *Thicker Walled Tubing*
- *Wider Conveyor Belts*  
*(50% higher capacity than similar sized tubes)*



**Up to  
18,000 BPH**



**NORWOOD**  
Sales Inc.

Horace, ND : 701.588.4000  
Cooperstown, ND : 701.797.3684  
Union, NE : 402.263.2100

www.Norwoodsales.com 1.800.446.0316

**Belt Conveyors & Accessories**

# Belt Conveyors

18, 22, 26 Series

## Features Include:

- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)
- 14" x 12 Ga tube w/ 26" 2ply chevron belt (18,000 Bu/hr)
- Weather guard standard
- A-frame undercarriage on 30' to 55'
- Hydraulic scissor lift on 65' to 125'
- Heavy Duty, Long Lasting, PEER Bearings  
1-1/2" (18 Series) 1-15/16" (22 Series) 2-3/16" (18 Series)
- Cable only trussing on 55' to 90'
- Steel trussing on 100' to 125'

## Options:

- Swing away models available in 65' to 125'
- Electric, Hydraulic, Gas or PTO drive
- Electric or Hydraulic Power Swing
- Self-propelled Mover Kit
- Hydraulic Winch Kit
- Fender & Light Kit
- Drive Clutch Kit



Lengths from  
30' to 125'



Up to  
18,000 BPH

# Transfer Conveyors

18, 22 Series

## Features Include:

- 35" x 77" Collapsible hopper
- 8" Hopper clearance at front of hopper when collapsed
- Adjustable discharge height from 28" to 56"
- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)

## Options:

- Electric, Hydraulic or Gas drive



Up to  
14,000 BPH

# Field Loaders

## 18, 22, 26 Series

### Features Include:

- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)
- 14" x 12 Ga tube w/ 26" 2ply chevron belt (18,000 Bu/hr)
- Heavy Duty, Long Lasting, PEER Bearings
  - 1-1/2" (18 Series) 1-15/16" (22 Series) 2-3/16" (18 Series)
- 8" Hopper clearance at front of hopper when collapsed
- 35" x 77" Collapsible hopper
- Weather guard standard
- A-frame undercarriage

Up to  
**18,000 BPH**



### Stainless Steel Features Include:

- 10" x 12 Ga 304 Stainless Steel tube w/ 18" belt (250 Ton/hr)
- 12" x 12 Ga 304 Stainless Steel tube w/ 22" belt (350 Ton/hr)
- 14" x 12 Ga 304 Stainless Steel tube w/ 26" belt (450 Ton/hr)
- Heavy Duty, Long Lasting, PEER Stainless Steel Bearings
  - 2-Ply epoxy and powder coat painted frame
  - Stainless steel weather guards
  - Stainless steel roller shafts

### Options:

- Drive Clutch Kit
- Fender & Light Kit
- Hydraulic Winch Kit
- Self-propelled Mover Kit
- Electric, Hydraulic, Gas or PTO drive

Lengths from  
**37' to 48'**



# Kwik-Pit

## 26 Series

### Features Include:

- 7-1/2" Hopper Clearance
- 36" x 114" Hydraulic collapsible hopper
- Hydraulic transport lift with safety pins
- 14" x 12 Ga tube w/
  - 26" 2ply chevron belt (18,000 Bu/hr)

### Options:

- Electric, Hydraulic or Gas drive
- Self-propelled Mover Kit
- Discharge Tube Extension Kits
- Hydraulic Wet Kit (for electric or gas drives)

Up to  
**18,000 BPH**

Hydraulic  
Flaps



1.800.446.0316

www.Norwoodsales.com

# FMD Field Loaders

# 18, 22 Series

## Features Include:

- All the same great features of the Field Loader
- Joystick Steering and Drive Control
- 37HP Kohler Hanging Gas Engine
  - Electric Start with Battery
  - Self-propelled Mover Kit
  - Hydraulic Winch
  - Electric Clutch

**Up to  
18,000 BPH**



## 18 Series Conveyors


Model	1Low Position		2High Position		Width	Weight (lbs)	HP Req.			HYD Req. (GPM / PSI)
	B	C	A	C			PTO	ELEC	GAS	
1815 TR	4'-2"	7'-2"	4'-8"	7'-2"	3'-6"	1,025	N/A	7.5	9.0	16 / 2500
1830 TD	11'-7"	12'-5"	14'-7"	11'-10"	7'-8"	1,680	N/A	10	N/A	16 / 2500
1835 TD	12'-10"	14'-4"	16'-10"	13'-3"	7'-8"	1,835	N/A	10	N/A	16 / 2500
1838 TDFL	11'-3"	17'-5"	17'-2"	15'-11"	7'-8"	2,105	N/A	12.5	N/A	16 / 2500
1840 TD	12'-5"	16'-10"	19'-7"	14'-10"	7'-8"	2,010	N/A	12.5	N/A	16 / 2500
1843 TDFL	11'-8"	19'-3"	19'-9"	17'-8"	7'-8"	2,250	N/A	12.5	N/A	16 / 2500
1845 TD	12'-0"	19'-0"	22'-1"	17'-1"	7'-8"	2,175	N/A	12.5	N/A	16 / 2500
1848 TDFL	13'-0"	21'-8"	22'-2"	20'-5"	7'-8"	2,380	N/A	12.5	N/A	16 / 2500
1850 TD	12'-10"	20'-6"	24'-7"	19'-2"	7'-8"	2,320	N/A	12.5	N/A	16 / 2500
1835 SD	12'-8"	15'-2"	16'-10"	14'-1"	7'-8"	2,205	20	12.5	37	16 / 2500
1838 SDFL	11'-3"	17'-5"	17'-2"	15'-11"	7'-8"	2,105	20	12.5	37	N/A
1840 SD	11'-1"	17'-8"	19'-7"	15'-8"	7'-8"	2,380	20	12.5	37	16 / 2500
1843 SDFL	13'-8"	19'-3"	19'-9"	17'-8"	7'-8"	2,250	20	12.5	37	N/A
1845 SD	13'-2"	19'-6"	22'-1"	17'-11"	7'-8"	2,545	20	12.5	37	16 / 2500
1848 SDFL	13'-0"	21'-8"	22'-2"	20'-5"	7'-8"	2,380	30	12.5	37	N/A
1850 SD	13'-4"	21'-4"	24'-7"	20'-0"	7'-8"	2,695	30	12.5	37	16 / 2500
1855 SD	13'-4"	22'-11"	27'-1"	22'-1"	7'-8"	2,840	35	12.5	37	16 / 2500
1865 SD	11'-7"	32'-5"	32'-2"	28'-5"	11'-3"	4,430	35	20	37	N/A
1875 SD	12'-7"	40'-4"	37'-2"	34'-8"	11'-3"	4,715	40	20	37	N/A
1885 SD	14'-1"	44'-5"	42'-2"	38'-6"	*11'-6"	5,970	45	25	37	N/A
1890 SD	14'-10"	49'-5"	44'-8"	42'-9"	*11'-6"	6,080	50	25	37	N/A
18100 SD	14'-4"	51'-6"	49'-8"	43'-5"	*11'-6"	7,350	50	30	37	N/A
18105 SD	15'-0"	56'-6"	52'-2"	47'-5"	*11'-6"	7,455	55	30	37	N/A

## 22 Series Conveyors

Model	1Low Position		2High Position		Width	Weight (lbs)	HP Req.			HYD Req. (GPM / PSI)
	B	C	A	C			PTO	ELEC	GAS	
2215 TR	4'-2"	7'-2"	4'-8"	7'-2"	3'-6"	1,130	N/A	7.5	9.0	16 / 2500
2230 TD	11'-7"	12'-5"	14'-7"	11'-10"	7'-8"	1,850	N/A	12.5	N/A	16 / 2500
2235 TD	12'-10"	14'-4"	16'-10"	13'-3"	7'-8"	2,020	N/A	12.5	N/A	16 / 2500
2238 TDFL	11'-3"	17'-5"	17'-2"	15'-11"	7'-8"	2,315	N/A	12.5	N/A	16 / 2500
2240 TD	12'-5"	16'-10"	19'-7"	14'-10"	7'-8"	2,210	N/A	15	N/A	16 / 2500
2243 TDFL	11'-8"	19'-3"	19'-9"	17'-8"	7'-8"	2,475	N/A	20	N/A	16 / 2500
2245 TD	12'-0"	19'-0"	22'-1"	17'-1"	7'-8"	2,395	N/A	15	N/A	16 / 2500
2248 TDFL	13'-0"	21'-8"	22'-2"	20'-5"	7'-8"	2,620	N/A	20	N/A	16 / 2500
2250 TD	12'-10"	20'-6"	24'-7"	19'-2"	7'-8"	2,550	N/A	20	N/A	16 / 2500
2235 SD	12'-8"	15'-2"	16'-10"	14'-1"	7'-8"	2,425	N/A	12.5	37	16 / 2500
2238 SDFL	11'-3"	17'-5"	17'-2"	15'-11"	7'-8"	2,315	20	12.5	37	N/A
2240 SD	13'-1"	17'-8"	19'-7"	15'-8"	7'-8"	2,620	N/A	15	37	16 / 2500
2243 SDFL	11'-8"	19'-3"	19'-9"	17'-8"	7'-8"	2,475	25	20	37	N/A
2245 SD	13'-2"	19'-6"	22'-1"	17'-11"	7'-8"	2,800	N/A	15	37	16 / 2500
2248 SDFL	13'-0"	21'-8"	22'-2"	20'-5"	7'-8"	2,620	30	20	37	N/A
2250 SD	13'-4"	21'-4"	24'-7"	20'-0"	7'-8"	2,965	N/A	20	N/A	16 / 2500
2255 SD	13'-4"	22'-11"	27'-1"	22'-1"	7'-8"	3,125	N/A	20	N/A	16 / 2500
2265 SD	11'-7"	32'-5"	32'-2"	28'-5"	11'-3"	4,873	60	30	N/A	N/A
2275 SD	12'-7"	40'-4"	37'-2"	34'-8"	*11'-3"	5,190	60	30	N/A	N/A
2285 SD	14'-1"	44'-5"	42'-2"	38'-6"	*11'-6"	5,970	70	40	N/A	N/A
2290 SD	14'-10"	49'-5"	44'-8"	42'-9"	*11'-6"	6,080	80	40	N/A	N/A
22100 SD	14'-4"	51'-6"	49'-8"	43'-5"	*11'-6"	7,350	80	40	N/A	N/A
22105 SD	15'-0"	56'-6"	52'-2"	47'-5"	*11'-6"	7,455	80	40	N/A	N/A
22110 SD	17'-0"	59'-4"	54'-10"	42'-9"	*11'-6"	9,730	100	50	N/A	N/A
22120 SD	17'-6"	62'-2"	59'-10"	50'-10"	*11'-6"	10,550	100	50	N/A	N/A
22125 SD	17'-6"	66'-1"	62'-4"	54'-10"	*11'-6"	10,850	100	50	N/A	N/A

## 26 Series Conveyors

Model	1Low Position		2High Position		Width	Weight (lbs)	HP Req.			HYD Req. (GPM / PSI)
	B	C	A	C			PTO	ELEC	GAS	
2625 KP	5'-4"	7'-3"	3'-4"	7'-3"	8'-0"	3,540	N/A	12.5	37	16 / 2500
2665 SD	11'-8"	32'-8"	32'-1"	28'-8"	*11'-6"	5,165	60	30	N/A	N/A
2675 SD	12'-8"	40'-7"	37'-1"	34'-11"	*11'-6"	5,960	70	30	N/A	N/A
2685 SD	14'-2"	44'-9"	42'-1"	38'-9"	*11'-6"	6,880	80	30	N/A	N/A
2690 SD	14'-11"	49'-8"	44'-7"	43'-1"	*11'-6"	7,020	80	40	N/A	N/A
26100 SD	14'-5"	51'-9"	49'-7"	43'-8"	*11'-6"	9,750	90	40	N/A	N/A
26105 SD	15'-1"	56'-9"	52'-1"	47'-8"	*11'-6"	10,235	90	40	N/A	N/A
26110 SD	16'-3"	60'-3"	54'-8"	51'-10"	*11'-6"	10,890	100	50	N/A	N/A
26120 SD	17'-0"	66'-0"	59'-8"	56'-5"	*11'-6"	11,700	120	50	N/A	N/A
26125 SD	17'-1"	68'-11"	62'-2"	58'-8"	*11'-6"	12,090	120	50	N/A	N/A

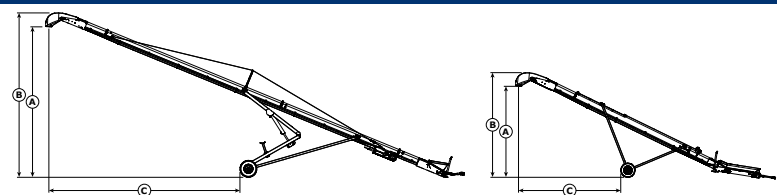

\*Axles extendable to 14'-8"

1Low Position is measured from ground to top of discharge spout.

2High Position is measured from ground to bottom of discharge spout at a 30° angle